



# Wiring for KF 6-way Hitch with Mirrors

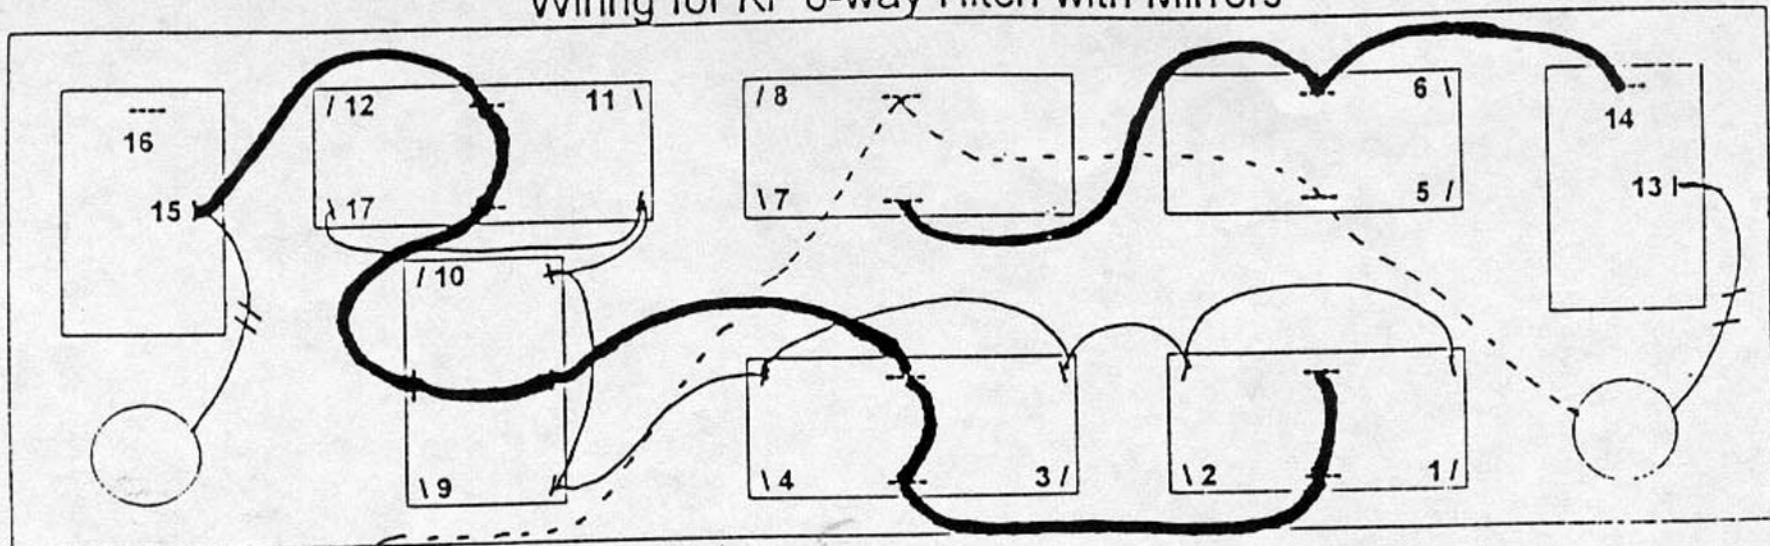

Blue Jumper —————

Red Jumper —————

Ground ( Black) - - - - -

Pilot Light ——— / / ———

## Cab Control

6-WAY HITCH AND HYDRAULIC MIRRORS  
Viewed from rear of control upside down

- |                                     |  |
|-------------------------------------|--|
| 1. Black 4 way from pump            | 11. Black 6-way from pump                    |
| 2. White 4 way from pump            | 12. White 6-way from pump                    |
| 3. Red 4 way from pump              | 13. Black Single from center of cab (D.O.T.) |
| 4. Green 4 way from pump            | 14. Black 3-way from pump                    |
| 5. White 4 way from mirrors (Right) | 15. Orange 6-way from pump                   |
| 6. Black 4 way from mirrors (Right) | 16. White 3-way from pump                    |
| 7. White 4 way from mirrors (left)  | 17. Blue 6-way from pump                     |
| 8. Black 4 way from mirrors (left)  | 18. Ground from mirror rotators              |
| 9. Red 6 way from pump              | 19. Green 3-way from pump                    |
| 10. Green 6-way from pump           | 20. Red 4-way from both mirrors              |

Both Green wires from 4-ways from mirrors are connected to blue wire from clearance lights which are also connected to rear cab cluster (on conventional conversions).

2 Orange wires from 4 way from mirrors are only used if there are lights on mirror drops.  
If so another switch must be installed in cab control.