




# Wiring for KF 6-way Hitch with Mirrors

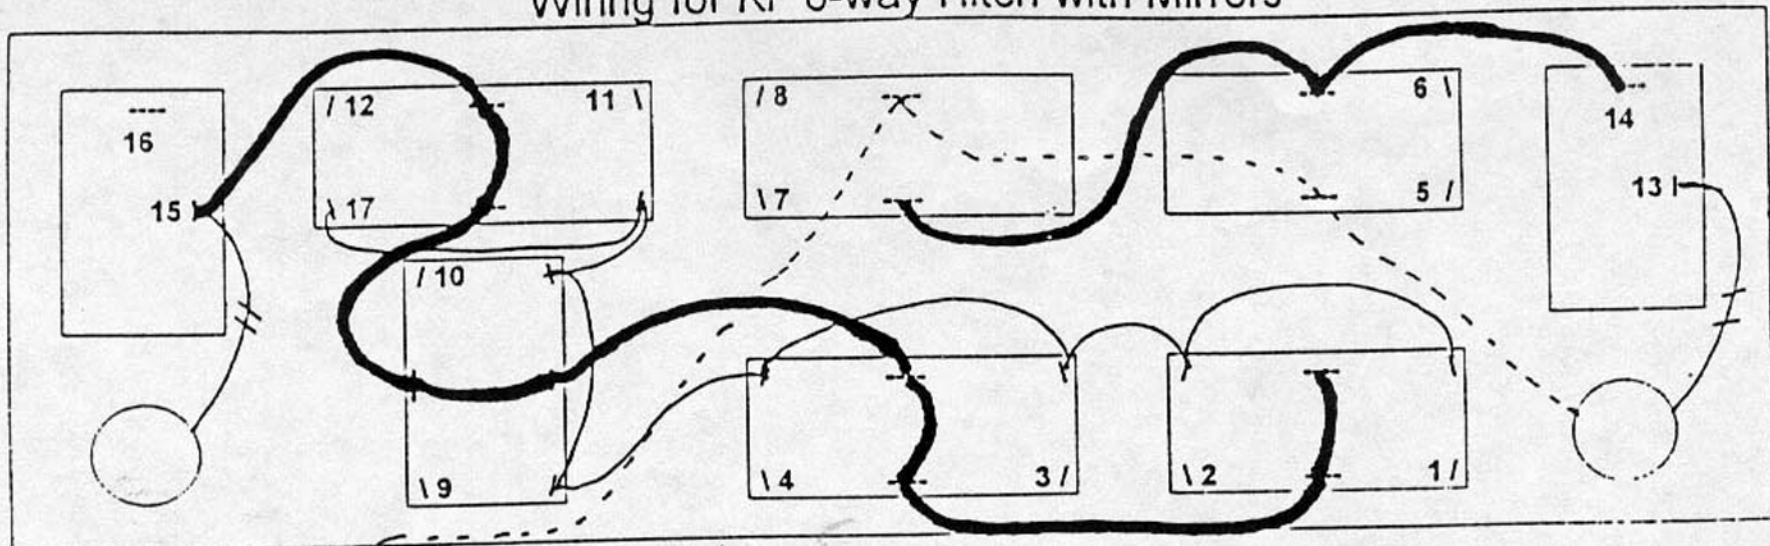

Blue Jumper 

Red Jumper 

Ground ( Black) 

Pilot Light 

## Cab Control

6-WAY HITCH AND HYDRAULIC MIRRORS  
Viewed from rear of control upside down

1. Black 4 way from pump
2. White 4 way from pump
3. Red 4 way from pump
4. Green 4 way from pump
5. White 4 way from mirrors (Right)
6. Black 4 way from mirrors (Right)
7. White 4 way from mirrors (left)
8. Black 4 way from mirrors (left)
9. Red 6 way from pump
10. Green 6-way from pump

11. Black 6-way from pump
12. White 6-way from pump
13. Black Single from center of cab (D.O.T.)
14. Black 3-way from pump
15. Orange 6-way from pump
16. White 3-way from pump
17. Blue 6-way from pump
18. Ground from mirror rotators
19. Green 3-way from pump
20. Red 4-way from both mirrors

Both Green wires from 4-ways from mirrors are connected to blue wire from clearance lights which are also connected to rear cab cluster (on conventional conversions).

2 Orange wires from 4 way from mirrors are only used if there are lights on mirror drops.  
If so another switch must be installed in cab control.